


ARMT-3 Clean Water Applications



- 2-1/2" NPT Brass Screw Plug
- Copper Sheath Elements
- High Watt Density (46 - 53 W/In²)
- 3 - 18 kW
- Integral Thermostat (DPST)
- 120, 208, 240 and 480 Volt, 1 and 3 Phase
- General Purpose Terminal Enclosure

E1 — Dimensions (Inches)

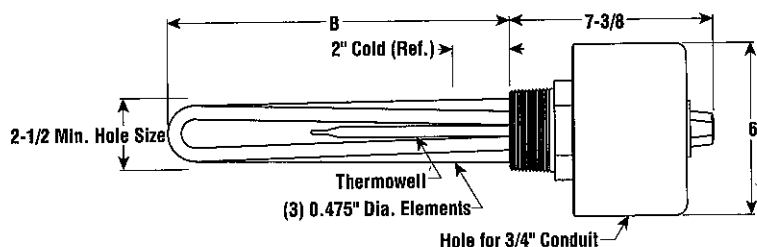

SCREW PLUG

Specifications and Ordering Information


kW	Volts	Phase	W/In ²	No. Elem.	DIM B (In.)	Wt. (Lbs.)	T2 — Temperature (60 - 250°F)			T1 — Temperature (0 - 100°F)		
							Model	Stock	PCN	Model	Stock	PCN
E1 General Purpose												
3	120	1	51	3	7-3/8	6	ARMT-3305T2	AS	190852	ARMT-3305T1	AS	310957
3	208	1	51	3	7-3/8	6	ARMT-3305T2	AS	320733	ARMT-3305T1	AS	320741
3	208	3	51	3	7-3/8	6	ARMT-3305T2	AS	320776	ARMT-3305T1	AS	320784
3	240	1	51	3	7-3/8	6	ARMT-3305T2	AS	285819	ARMT-3305T1	AS	285800
3	240	3	51	3	7-3/8	6	ARMT-3305T2	AS	274810	ARMT-3305T1	AS	285843
3	480	1	51	3	7-3/8	6	ARMT-3305T2	AS	270297	ARMT-3305T1	AS	310981
3	480	3	51	3	7-3/8	6	ARMT-3305T2	AS	270300	ARMT-3305T1	AS	310990
3.75	120	1	52	3	8-7/8	6	ARMT-3375T2	AS	190895	ARMT-3375T1	AS	311044
3.75	208	1	52	3	8-7/8	6	ARMT-3375T2	AS	320813	ARMT-3375T1	AS	320821
3.75	208	3	52	3	8-7/8	6	ARMT-3375T2	AS	320856	ARMT-3375T1	AS	320864
3.75	240	1	52	3	8-7/8	6	ARMT-3375T2	AS	285886	ARMT-3375T1	AS	285878
3.75	240	3	52	3	8-7/8	6	ARMT-3375T2	AS	285923	ARMT-3375T1	AS	285915
3.75	480	1	52	3	8-7/8	6	ARMT-3375T2	AS	270350	ARMT-3375T1	AS	311052
3.75	480	3	52	3	8-7/8	6	ARMT-3375T2	AS	274829	ARMT-3375T1	AS	311060
4.5	120	1	48	3	11-3/8	7	ARMT-3455T2	AS	270377	ARMT-3455T1	AS	311132
4.5	208	1	48	3	11-3/8	7	ARMT-3455T2	AS	320899	ARMT-3455T1	AS	320901
4.5	208	3	48	3	11-3/8	7	ARMT-3455T2	AS	320936	ARMT-3455T1	AS	320944
4.5	240	1	48	3	11-3/8	7	ARMT-3455T2	AS	285966	ARMT-3455T1	AS	285958
4.5	240	3	48	3	11-3/8	7	ARMT-3455T2	AS	274837	ARMT-3455T1	AS	285990
4.5	480	1	48	3	11-3/8	7	ARMT-3455T2	AS	286037	ARMT-3455T1	AS	286029
4.5	480	3	48	3	11-3/8	7	ARMT-3455T2	AS	274845	ARMT-3455T1	AS	286061
6	120	1	48	3	17-3/8	8	ARMT-3605T2	AS	270430	ARMT-3605T1	AS	311167
6	208	1	48	3	17-3/8	8	ARMT-3605T2	AS	320979	ARMT-3605T1	AS	320987
6	208	3	48	3	17-3/8	8	ARMT-3605T2	AS	321015	ARMT-3605T1	AS	321023
6	240	1	48	3	17-3/8	8	ARMT-3605T2	AS	286109	ARMT-3605T1	AS	286096
6	240	3	48	3	17-3/8	8	ARMT-3605T2	AS	274853	ARMT-3605T1	AS	286133
6	480	1	48	3	17-3/8	8	ARMT-3605T2	AS	286176	ARMT-3605T1	AS	286168
6	480	3	48	3	17-3/8	8	ARMT-3605T2	S	286213	ARMT-3605T1	AS	286205
7.5	208	1	53	3	19-1/8	8	ARMT-3755T2	AS	321058	ARMT-3755T1	AS	321066
7.5	208	3	53	3	19-1/8	8	ARMT-3755T2	AS	321090	ARMT-3755T1	AS	321103
7.5	240	1	53	3	19-1/8	8	ARMT-3755T2	AS	274861	ARMT-3755T1	AS	286230
7.5	240	3	53	3	19-1/8	8	ARMT-3755T2	AS	286272	ARMT-3755T1	AS	286264
7.5	480	1	53	3	19-1/8	8	ARMT-3755T2	AS	286310	ARMT-3755T1	AS	286301
7.5	480	3	53	3	19-1/8	8	ARMT-3755T2	AS	286352	ARMT-3755T1	AS	286344
9	208	1	47	3	24-1/2	9	ARMT-3905T2	AS	321138	ARMT-3905T1	AS	321146
9	208	3	47	3	24-1/2	9	ARMT-3905T2	AS	321170	ARMT-3905T1	AS	321189
9	240	1	47	3	24-1/2	9	ARMT-3905T2	AS	286395	ARMT-3905T1	AS	286387
9	240	3	47	3	24-1/2	9	ARMT-3905T2	AS	274870	ARMT-3905T1	AS	286424
9	480	1	47	3	24-1/2	9	ARMT-3905T2	AS	286467	ARMT-3905T1	AS	286459
9	480	3	47	3	24-1/2	9	ARMT-3905T2	AS	274888	ARMT-3905T1	AS	285491

ARMT-3 Clean Water Applications (cont'd.)



- 2-1/2" NPT Brass Screw Plug
- Copper Sheath Elements
- High Watt Density (46 - 53 W/In²)
- 3 - 18 kW
- Integral Thermostat (DPST)
- 120, 208, 240 and 480 Volt, 1 and 3 Phase
- General Purpose Terminal Enclosure

E1 — Dimensions (Inches)

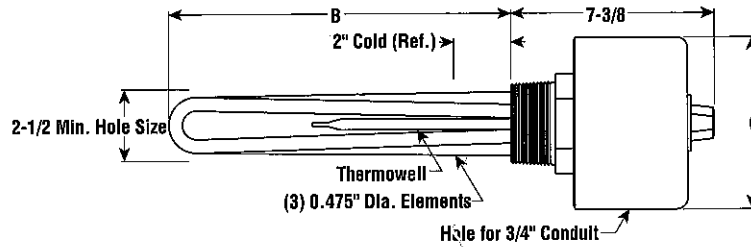

Specifications and Ordering Information

							T2 — Temperature (60 - 250°F)			T1 — Temperature (0 - 100°F)		
kW	Volts	Phase	W/In ²	No. Elem.	DIM B (In.)	Wt. (Lbs.)	Model	Stock	PCN	Model	Stock	PCN
E1 General Purpose												
12	208	1	46	3	32-5/16	13	ARMT-31205T ¹	AS	321218	ARMT-31205T ¹¹	AS	321226
12	208	3	46	3	32-5/16	13	ARMT-31205T ²	AS	321250	ARMT-31205T ¹	AS	321269
12	240	1	46	3	32-5/16	13	ARMT-31205T ¹	AS	321293	ARMT-31205T ¹¹	AS	321306
12	240	3	46	3	32-5/16	13	ARMT-31205T ²	AS	321330	ARMT-31205T ¹	AS	321349
12	480	1	46	3	32-5/16	13	ARMT-31205T ²	AS	321373	ARMT-31205T ¹	AS	321381
12	480	3	46	3	32-5/16	13	ARMT-31205T ²	AS	321410	ARMT-31205T ¹	AS	321429
15	208	1	46	3	39-3/4	14	ARMT-31505T ¹	AS	321453	ARMT-31505T ¹¹	AS	321461
15	208	3	46	3	39-3/4	14	ARMT-31505T ²	AS	321496	ARMT-31505T ¹	AS	321509
15	240	1	46	3	39-3/4	14	ARMT-31505T ¹	AS	321533	ARMT-31505T ¹¹	AS	321541
15	240	3	46	3	39-3/4	14	ARMT-31505T ²	AS	321576	ARMT-31505T ¹	AS	321584
15	480	1	46	3	39-3/4	14	ARMT-31505T ²	AS	321613	ARMT-31505T ¹	AS	321621
15	480	3	46	3	39-3/4	14	ARMT-31505T ²	AS	321656	ARMT-31505T ¹	AS	321664
18	208	3	46	3	47-1/4	15	ARMT-31805T ¹	AS	321699	ARMT-31805T ¹¹	AS	321701
18	240	1	46	3	47-1/4	15	ARMT-31805T ²	AS	321736	ARMT-31805T ¹¹	AS	321744
18	240	3	46	3	47-1/4	15	ARMT-31805T ²	AS	321779	ARMT-31805T ¹	AS	321787
18	480	1	46	3	47-1/4	15	ARMT-31805T ²	AS	321816	ARMT-31805T ¹	AS	321824
18	480	3	46	3	47-1/4	15	ARMT-31805T ²	AS	321859	ARMT-31805T ¹	AS	321867

Stock Status: S = stock AS = assembly stock NS = non-stock
To Order—Specify model, volts, phase, kW, PCN and quantity.

1. Not UL Listed or CSA Certified (Exceeds 48 Amps).