

Immersion




ARMTS-3 Process Water Applications



- 2-1/2" NPT Stainless Steel Passivated Screw Plug
- Stainless Steel Passivated Sheath Elements
- High Watt Density (46 - 53 W/in²)
- 3 - 18 kW
- Integral Thermostat (DPST)
- 208, 240 and 480 Volt, Three Phase
- General Purpose Terminal Enclosure

E1 — Dimensions (Inches)

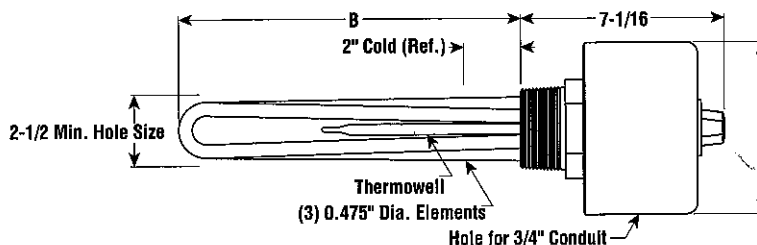

Specifications and Ordering Information

							T2 — Temperature (60 - 250°F)			T1 — Temperature (0 - 100°F)		
kW	Volts	Phase	W/in ²	No. Elem.	DIM B (In.)	Wt. (Lbs.)	Model	Stock	PCN	Model	Stock	PCN
E1 General Purpose												
3	208	3	51	3	7	8	ARMTS-3305T2	AS	187100	ARMTS-3305T1	AS	187119
3	240	3	51	3	7	8	ARMTS-3305T2	AS	184786	ARMTS-3305T1	AS	184823
3	480	3	51	3	7	8	ARMTS-3305T2	AS	184794	ARMTS-3305T1	AS	184831
4.5	208	3	48	3	11	8	ARMTS-3455T2	AS	187143	ARMTS-3455T1	AS	187151
4.5	240	3	48	3	11	8	ARMTS-3455T2	AS	184866	ARMTS-3455T1	AS	184903
4.5	480	3	48	3	11	8	ARMTS-3455T2	AS	184874	ARMTS-3455T1	AS	184911
6	208	3	48	3	17	9	ARMTS-3605T2	AS	187186	ARMTS-3605T1	AS	187194
6	240	3	48	3	17	9	ARMTS-3605T2	AS	184946	ARMTS-3605T1	AS	184989
6	480	3	48	3	17	9	ARMTS-3605T2	AS	184955	ARMTS-3605T1	AS	184997
7.5	208	3	53	3	18-1/2	10	ARMTS-3755T2	AS	187223	ARMTS-3755T1	AS	187231
7.5	240	3	53	3	18-1/2	10	ARMTS-3755T2	AS	185025	ARMTS-3755T1	AS	185068
7.5	480	3	53	3	18-1/2	10	ARMTS-3755T2	AS	185033	ARMTS-3755T1	AS	185076
9	208	3	47	3	24	10	ARMTS-3905T2	AS	187266	ARMTS-3905T1	AS	187274
9	240	3	47	3	24	10	ARMTS-3905T2	AS	185105	ARMTS-3905T1	AS	185148
9	480	3	47	3	24	10	ARMTS-3905T2	AS	185113	ARMTS-3905T1	AS	185156
12	208	3	46	3	32	11	ARMTS-3120T2	AS	187305	ARMTS-3120T1	AS	187311
12	240	3	46	3	32	11	ARMTS-3120T2	AS	185180	ARMTS-3120T1	AS	185228
12	480	3	46	3	32	11	ARMTS-3120T2	AS	185199	ARMTS-3120T1	AS	185236
15	208	3	46	3	39-1/2	12	ARMTS-3150T2	AS	187346	ARMTS-3150T1	AS	187354
15	240	3	46	3	39-1/2	12	ARMTS-3150T2	AS	185260	ARMTS-3150T1	AS	185308
15	480	3	46	3	39-1/2	12	ARMTS-3150T2	AS	185279	ARMTS-3150T1	AS	185316
18	208	3	51	3	47	13	ARMTS-3180T2 ¹	AS	187389	ARMTS-3180T1 ¹	AS	187397
18	240	3	51	3	47	13	ARMTS-3180T2	AS	185340	ARMTS-3180T1	AS	185383
18	480	3	51	3	47	13	ARMTS-3180T2	AS	185359	ARMTS-3180T1	AS	185391

Stock Status: S = stock AS = assembly stock NS = non-stock
To Order—Specify model, volts, phase, kW, PCN and quantity.

1. Not UL Listed or CSA Certified (Exceeds 48 Amps).